




'DIFFERENT MOBILE LANE SIGNALING SYSTEMS AVAILABLE'



MOBILE LANE SIGNALING

(MLS)

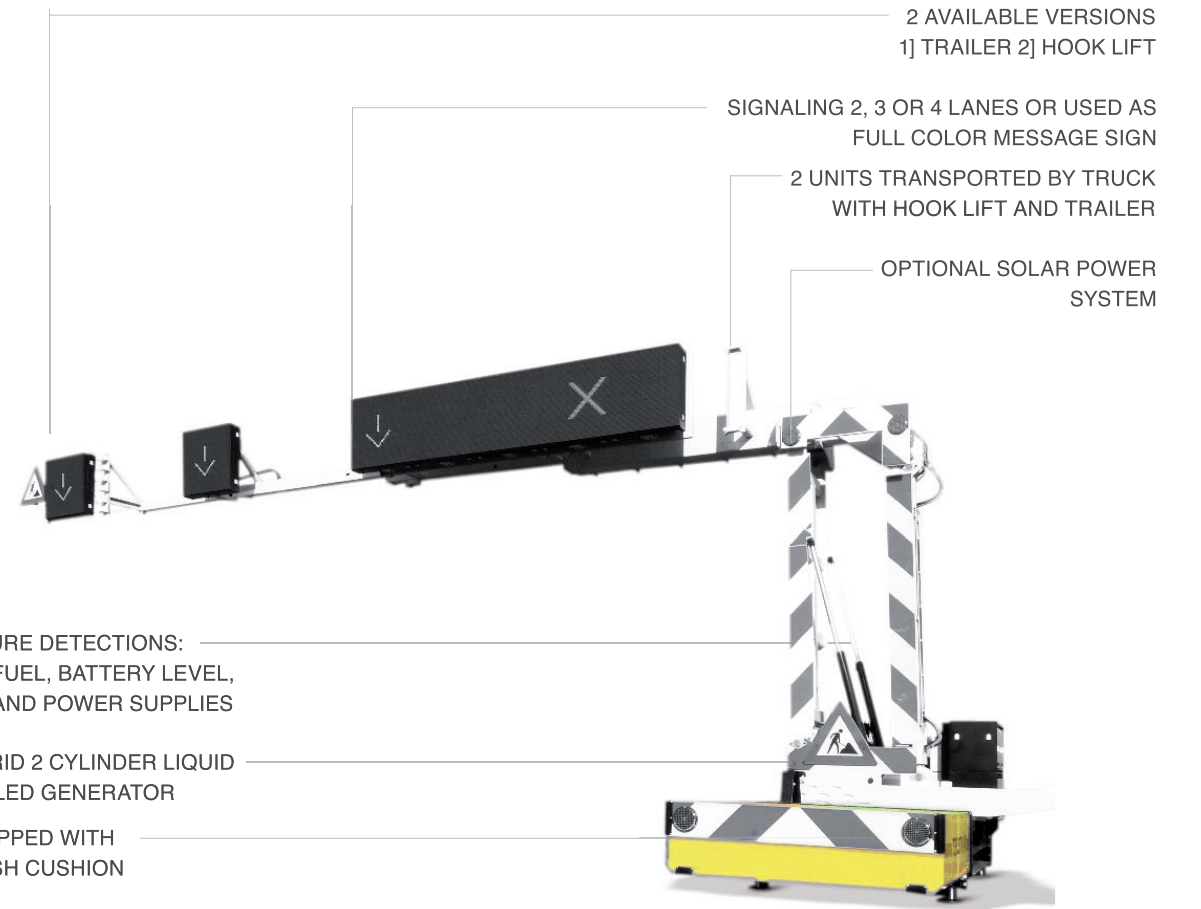

FAILURE DETECTIONS:
OIL, FUEL, BATTERY LEVEL,
LED AND POWER SUPPLIES

HYBRID 2 CYLINDER LIQUID
COOLED GENERATOR

EQUIPPED WITH
CRASH CUSHION

OPTICS ACC. NEN-EN 12966
EMC TESTED (ELECTROMAGNETIC COMPATIBILITY)
3G/ WIFI OR UMTS WIRELESS COMMUNICATION

± 14.000 KG

