
VERDEGRO®

The Verdegro LED Light Tower Trailer Solar (LLTT-S) is equipped with a big battery bank , charged by solar power charge system. The standard height of the mast of the unit is 9m. Standard equipped with 4 LED floodlights of 100Watt with horizontal and vertical 180 degree angle lighting possibilities, optional 6 LED floodlights version available. Custom specs on request.

LED LIGHT TOWER TRAILER SOLAR

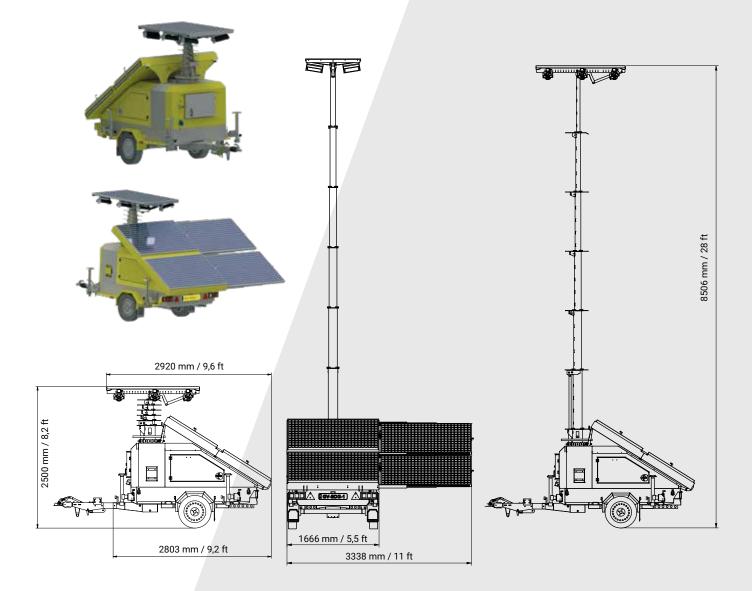

DIMENSIONS AND WEIGHT

- Dimensions min: 2800x1700x2500 mm
- Total weight; 1500kg / 3306 lbs

FEATURES

- 100Watt LED flootlight with 17000 efective lumen. Standard equipped with 4 up to 6 lights
- Photocell daylight sensor (automatic/on/off)
- Spiral cable
- Geo fencing by DSE web interface 4G (optional)
- Two front + two back outriggers and leveling jacks
- Torsion rubber suspension axle
- Information LED backlight controller screen
- Forklift sprockets on top + below
- 270 degrees mast rotation

LIFTING SYSTEM

- Hydraulic winch, automatically
- 9m high
- Maximum wind speed 110 km/h

BATTERY BANK

- Long life gel AGM battery bank 900Ah 24Vdc
- Standard equipped with battery guard

SOLAR SYSTEM

• Solar system 1500Wp (standard)