


The LED Light Tower Trailer Hybrid is the result of 15 years of experience and innovation. Its hybrid technology ensures the lowest fuel consumption in its class.

"This is the light tower you always needed for your job!"



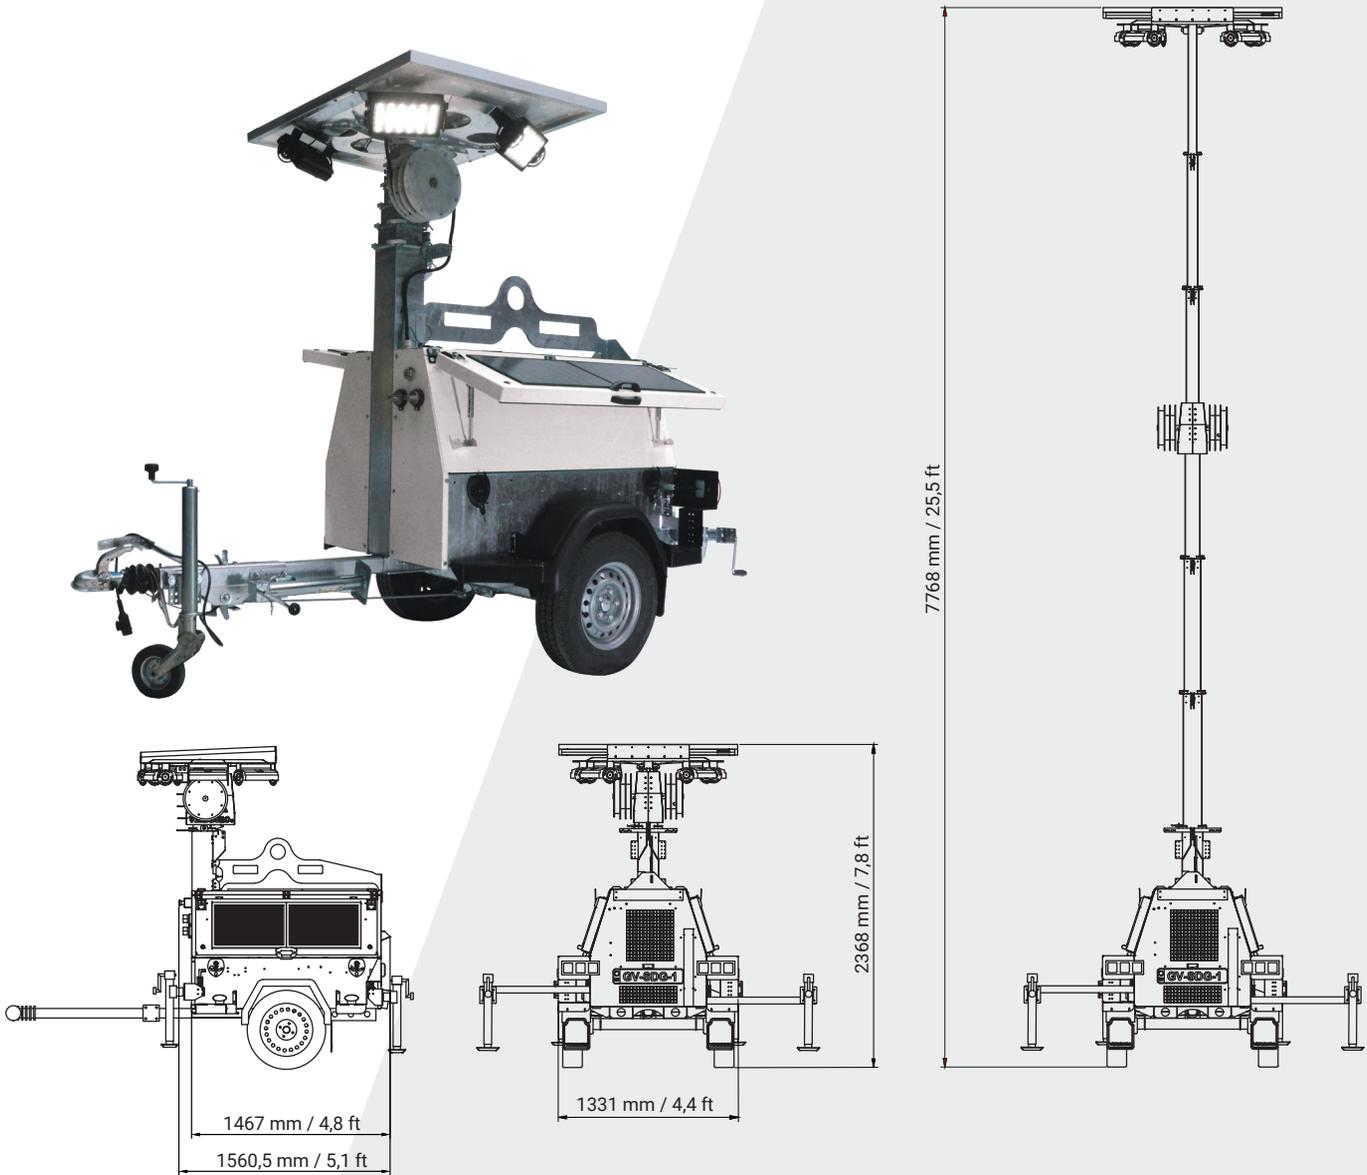

DIMENSIONS AND WEIGHT

- Dimension min : 1922mm x 1331mm x 2299mm
- Dimension max : 1922mm x 2520mm x 7799mm
- Total weight without fuel : 985 kg / 2171 lbs

FEATURES

- 100 W LED floodlight with 17000 effective lumen
Standard equipped with 4 up to 6 lights
- Photocell daylight sensor (automatic/on/off)
- Spiral cable
- Geo fencing by Mobilityplanner (optional)
- Two front + two back outriggers and leveling jacks
- Torsion rubber suspension axle
- Information LED backlight controller screen
- Forklift pockets below chassis
- Geo fencing by Mobilityplanner (optional): visibility in Waze, Flitsmeister, Apple Maps, Here

LIFTING SYSTEM

- Electric winch, automatically
- 8 m high
- Maximum wind speed 110 km/h

ENGINE

- Kubota Z482 Tier 4
- Diesel / HVO100
- Tank capacity : 140L / 37 gallon (110% liquid spill containment)
- Consumption (L/H) : 0.4 L/H 0.1 gal/H
- Noise level at 7 meters : 65 dB(A)
- Runtime 35 days standalone depending on light output
- Engine speed : 3200 RPM (2 cylinders)
- Engine cooling : liquid

BATTERY BANK

- Long life gel AGM battery bank 300 Ah 24 Vdc
- Standard equipped with battery guard
- 55 Ah starter battery for Kubota Z482 engine

SOLAR SYSTEM

- Solar system 435 Wp (standard)
- Solar charger 20 A