


The 2510 mm version!

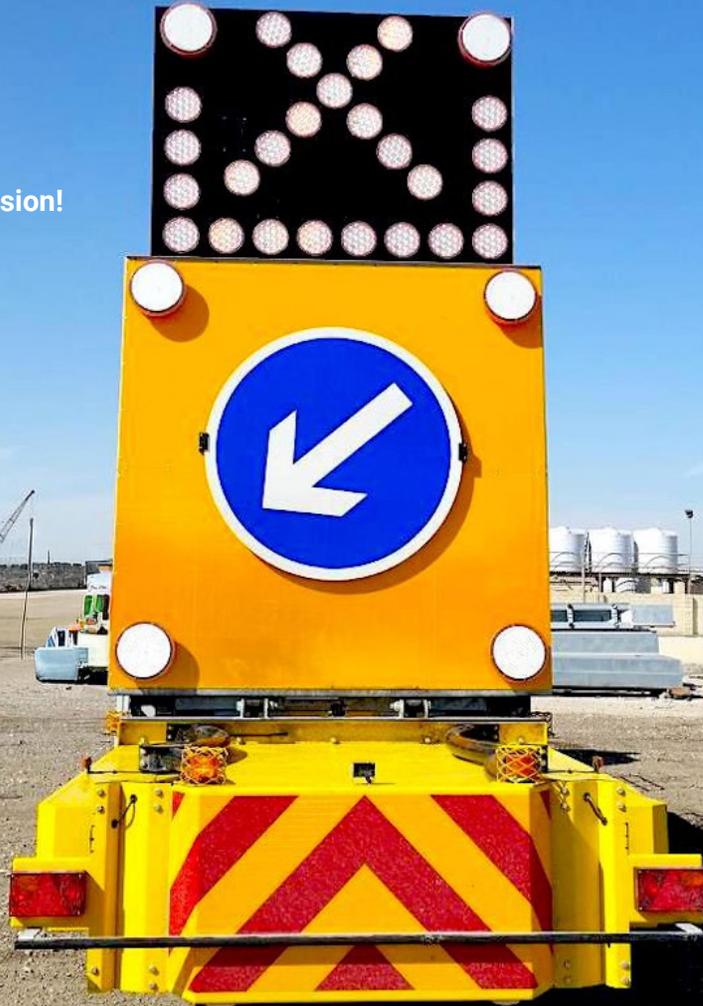

VD-SL250

TECHNICAL SPECIFICATIONS

- 300 mm LED flashers on top board and on all four corners of the lower board
- 200 mm LED light arrow (Left, Right, Cross)
- Wired in-cabin control for TMA and arrow board
- Hydraulically movable 211 Sign, 1500 mm (Left, Right, Down)
- Hydraulic vertical lift for top arrow board

ABOUT THE VD-SL250

The VD-SL250 arrow board is a reliable and high-performance traffic control solution widely used across the UK, UAE, Qatar, and the GCC region.

Designed for seamless integration, the VD-SL250 can be operated through the Verdegro combined TMA and arrow board wired controller when supplied as a complete system. This setup utilizes the TMA's hydraulic system, allowing the operator to raise and lower the TMA and control the left arrow, right arrow, and cross functions directly from one handheld controller.

The controller also features three programmable function buttons that can be assigned to additional tasks such as work lights or extra flashers, ensuring efficient operation and enhanced focus on the job.

For flexible installation options, the VD-SL250 is also available as a standalone arrow board mounted directly on the vehicle. In this configuration, a separate hydraulic powerpack can be supplied for full operational capability.

Table of contents and dimensions

Transport height	2529 mm / 8,3 ft
Installation length	4129 mm / 13,5 ft
Width	2510 mm / 8,2 ft
Weight complete installation	Approx. 550 kg / 1210 lbs

Note: all these dimensions are approximately, no rights can be derived.

VD-SL250 ARROW BOARD

