



VD1-VW

**TECHNICAL SPECIFICATIONS**

**Construction & Design**

- Trailer fitted with 1 torsion spring axle rated at 1350 kg / 2976 lbs, with overrun brake
- Trailer weight (empty): 950 kg / 2094 lbs
- Maximum permitted total weight (on registration): 1350 kg / 2976 lbs
- Equipped with legally required driving lights including rear fog lamp
- Trailer finished in RAL 1016 or in accordance with country specifications

**Hydraulic System & Operation**

- Fully hydraulically operated
- Single-acting (pulling) spring return support jacks and nose wheel
- Hydraulically adjustable action window

- Hydraulic-electric power pack rated at 1.6 kW
- Action window movable up to 45 m/h

**Action Window**

- Action window equipped with four alternating LED lights in accordance with Dutch CROW specifications
- Control unit with automatic brightness control, EN12353 approved
- Action window fitted with retro-reflective frame edges and folding sign "moving barrier", all in diamond grade foil class 3
- Mounted sign booklet

**Power supply & Battery system**


- Battery bank 400 Ah / 12 Vdc, AGM, completely maintenance-free and sealed
- Provides at least 120 hours of alternating lighting (excluding hydraulic consumption)
- 10-pole plug for operation from towing vehicle

**OPTIONAL**


- Andreas strip set




## VD1-VW

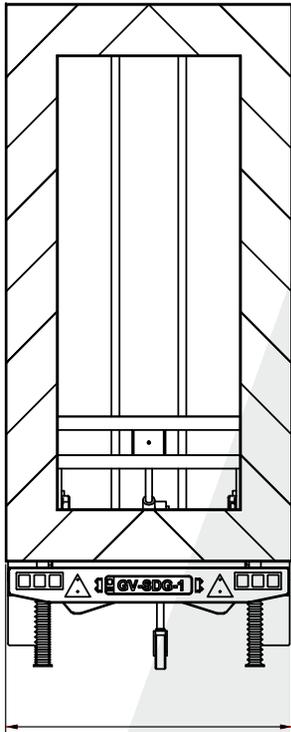

1712 mm / 5,6 ft




1712 mm / 5,6 ft

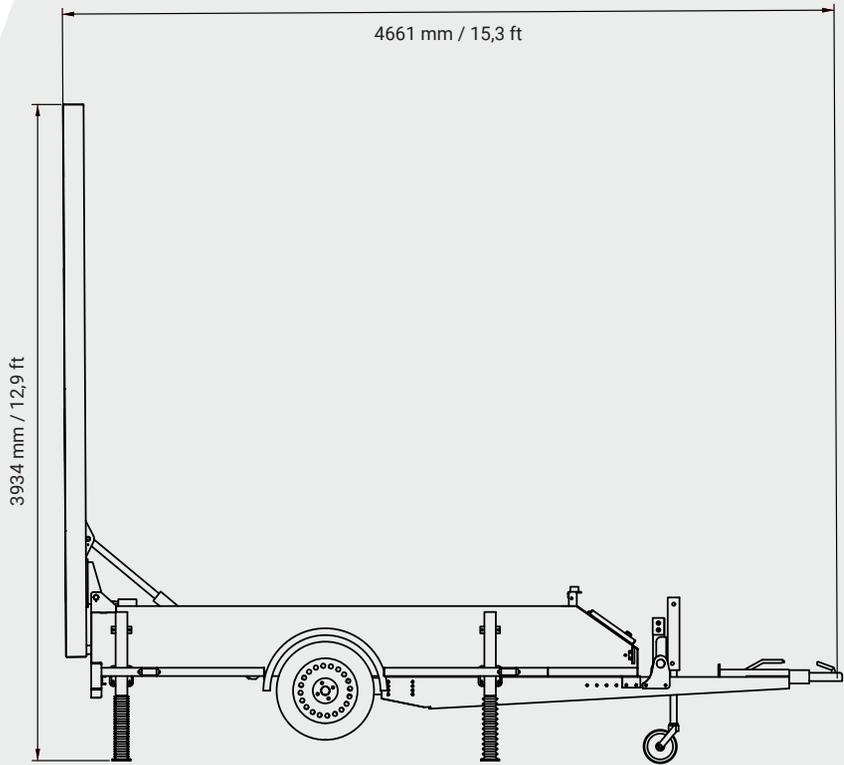

4661 mm / 15,3 ft

3934 mm / 12,9 ft

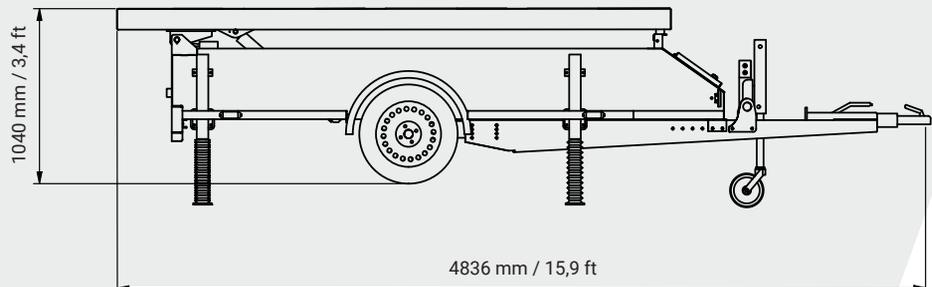

4836 mm / 15,9 ft

1040 mm / 3,4 ft