

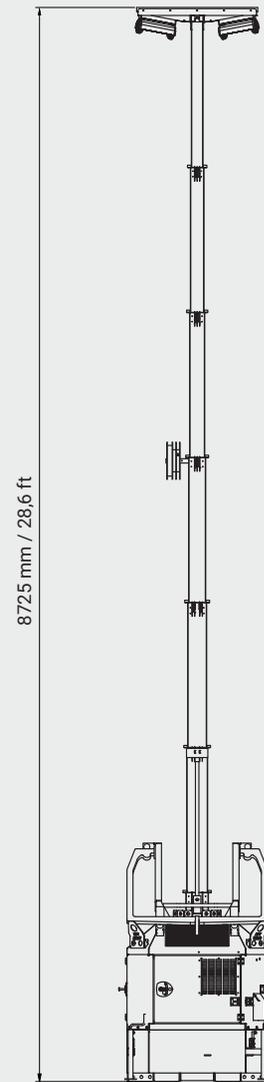


Verdegro's LED Light Tower Bucket Hybrid has an unique bucket handling system with tiltable hood.

LLTB-H

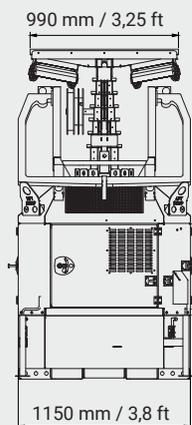

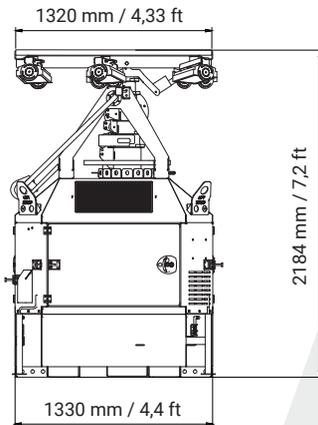

DIMENSIONS AND WEIGHT

- Dimension min : 1330mm x 1150mm x 2180mm
- Dimension max : 2806mm x 2626mm x 8730mm
- Total weight without fuel : 1250 kg / 2755 lbs

FEATURES

- 100 W LED floodlight with 17000 effective lumen
- Standard equipped with 4 up to 8 lights
- Unique bucket handling system with tiltable hood
- Automatic darkness sensor
- Spiral cable
- Rotatable swivel jacks
- Information LED backlight controller screen
- Forklift pockets below chassis
- Equipped with a spill container
- Geo fencing by Mobilityplanner (optional): visibility in Waze, Flitsmeister, Apple Maps, Here

LIFTING SYSTEM

- Hydraulic winch, automatically
- 9 m high
- Maximum wind speed 110 km/h

ENGINE

- Kubota Z482 Tier 4
- Diesel / HVO100
- Tank capacity : 270L / 71 gallon (110% liquid spill containment)
- Consumption (L/H) : 0.4 L/H 0.1 gal/H
- Noise level at 7 meters : 65 dB(A)
- Runtime 65-70 days standalone depending on light output
- Engine speed : 3200 RPM (2 cylinders)
- Engine cooling : liquid

BATTERY BANK

- Long life gel AGM battery bank 400 Ah 24 Vdc
- Maintenance free battery bank
- 55 Ah starter battery for Kubota Z482 engine

SOLAR SYSTEM

- Solar system 375 Wp (standard)
- Solar charger 20 A